

NOTES:

Item: AMOS16
 Operating Speed: 0~300RPM, Higher speed can be custom
 Working Temperature: -20°C ~ +80°C
 Working Humidity: 10%~60%RH
 Voltage Rating: 240VAC/DC
 Current Rating: 2A
 Dielectric Stength:500VAC@50Hz, 60s
 Insulation Resistance:500MΩ@ 500VDC
 Electrical Noise:1mΩMin
 Contact Material :Precious metal
 Lead wire: Teflon®UL 30AWG
 Lead wire length:250mm
 Material: Metal housing, plastic shaft
 Drawings not actual size, dimensions are in millimeters

Model	NO. of Circuits	L
AMOS16-12	12	20.4
AMOS16-24	24	31.2
AMOS16-36	36	42.0
AMOS16-48	48	52.8

Drawn	JAM	TOLERANGCE EXCEPT AS NOTED
Checked	TOM	
Checked	TOM	


X.X ±.125
 X.XX ±.015
 X.XXX ±.005
 ANGLES ± 0.5°



CUSTOMER APPROVAL/DATE:

CUSTOMER:

THIRD ANGLE PROJECTION

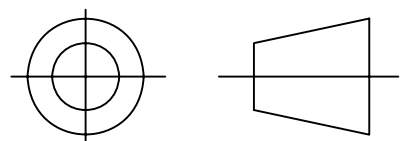

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPEIETARY TO COSMAU TECHNOLOGY CO.,LIMITED NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR TI IS CONTENTS , IN WHOLE OR PART,SHALL BE MADE WIHOUT THE WILTTEN CONSENT FROM COSMAU.

P/N:

REV:
A.1