

SRF15A Series Overview

Description

SRF15A are large current, capsule slip rings. In applications like small wind turbines, revolving stage of lights industry. precious metal contact, ensure the stability and working life.

22mm outside diameter, 15A/circuit, 2, 3, 4 circuits are available.



Specifications


Item	
Operating Speed	Max.150 RPM*
Number of Circuits	2~4 wires
Lead Wire	AWG14#, Teflon, 250mm
Voltage	400V AC/DC
Operating Temperature	-20 ℃ to 65 ℃
Current Rating	15A circuits
Noise	<0.01Ω
Torque	0.02N.m
Housing Material	Plastic
Protection Grade	IP51

* Please note that the operational life of the unit is dependent upon rotational speed, environment and temperature

INTRODUCE

SRF15A

SRF15A Series Dimensions

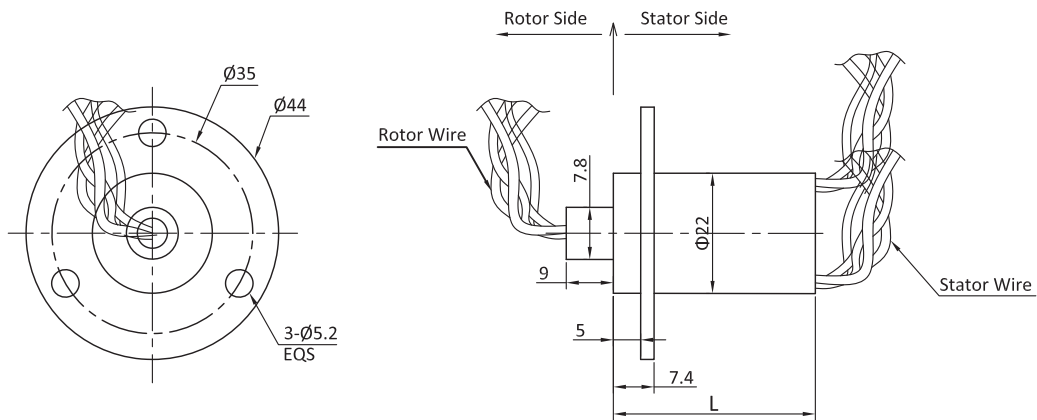

Notes:

1. Drawings not actual size, dimensions are in millimeters

Part# List

Model#	Power Circuits(15A)	Signal (2A)	Voltage(V)	OD(mm)	Length(mm)
SRF15A-2	2	–	400	22	26.4
SRF15A-3	3	–	400	22	35
SRF15A-4	4	–	400	22	42.5