

## SRF30A Series Overview

### Description

SRF30A are large current, capsule slip rings. In applications like small wind turbines, revolving stage of lights industry. precious metal contact, ensure the stability and working life.

22mm / 31mm outside diameter, 30A/circuit, 2, 3, 4, 6 circuits are available.



### Specifications


Item	
Operating Speed	Max.150 RPM*
Number of Circuits	2~6 wires
Lead Wire	AWG12#, Teflon, 250mm
Voltage	440V AC/DC
Operating Temperature	-20 ℃ to 60 ℃
Current Rating	30A circuits
Noise	<0.01Ω
Torque	<0.1N.m
Housing Material	Plastic
Protection Grade	IP51

\* Please note that the operational life of the unit is dependent upon rotational speed, environment and temperature

# INTRODUCE

## SRF30A

### SRF30A Series Dimensions

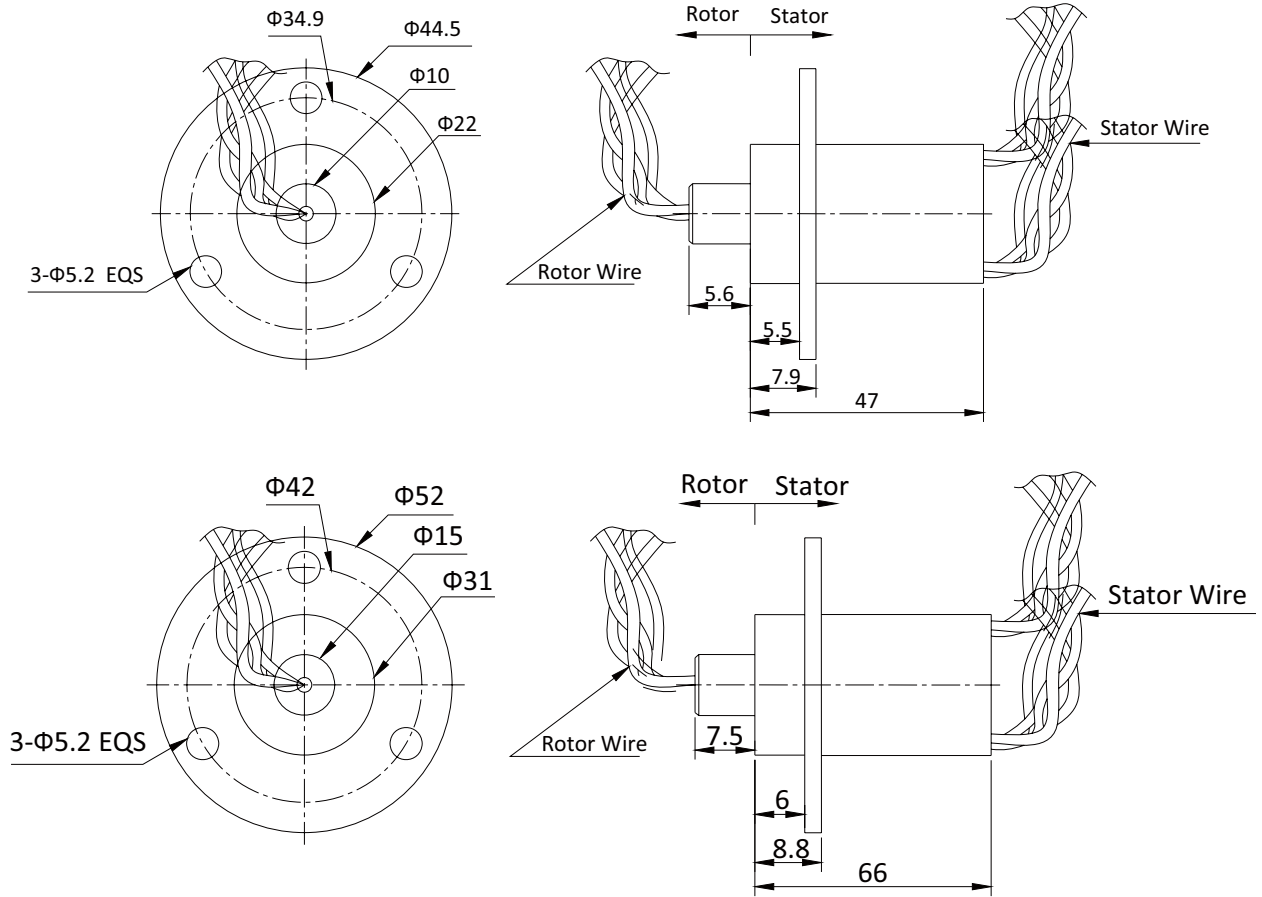

#### Notes:

1. Drawings not actual size, dimensions are in millimeters

### Part# List

Model#	Power Circuits(30A)	Signal (2A)	Voltage(V)	OD(mm)	Length(mm)
SRF230	2	-	440	22	47
SRF330	3	-	440	22	47
SRF430	4	-	440	31	66
SRF630	6	-	440	31	66